

# EASYLIGHTS



Intelligent office luminaires for height-adjustable sit stand desks

## CONTENT

<b>3</b>	Easy One
<b>6</b>	Easy Too
<b>9</b>	Easy Tandem
<b>12</b>	Easy Twin
<b>15</b>	Easy Series overview
<b>16</b>	Luminosity Range Control
<b>17</b>	Contact




# EASY ONE

## Office floor luminaire with Luminosity Range Control

Easy One combines direct and indirect illumination with an extendable and pivotable lamp head to ensure constant light conditions at any desktop height of sit stand desks. The integrated sensor system brings the light to the place where it is needed: your desktop. Optionally available with presence indicator.

Order numbers	Version	Colour	LRC	PIR
EO-SL-9006	floor luminaire	RAL 9006	●	–
EO-SP-9006	floor luminaire	RAL 9006	●	●
EO-SL-9010	floor luminaire	RAL 9010	●	–
EO-SP-9010	floor luminaire	RAL 9010	●	●






# EASY ONE

## SPECIFICATIONS

Operating voltage	: 24 volts
Power consumption	: max. 55 watts
Standby mode	: 0.5 watts
External power supply	: 220 – 240 volts, 50 / 60 hertz
Light colour	: 4,000 K, neutral white
Luminous flux	: 5,500 lumens
Illuminance	: 800 lux at all desktop heights
Illumination	: direct / indirect / spot, switched separately
Operation	: switchable / dimmable / LRC / PIR
Lamp	: LED
Protection class	: IP20

## FEATURES

Lamp head	: extendable and pivotable by 90°
Base plate	: height adjusters can be easily operated from the top
Pole	: divisible
Surface	: RAL9006 white aluminum / RAL9010 pure white
Packaging dimensions	: L / W / H = 1,200 / 400 / 150 mm
Weight	: approx. 20 kg

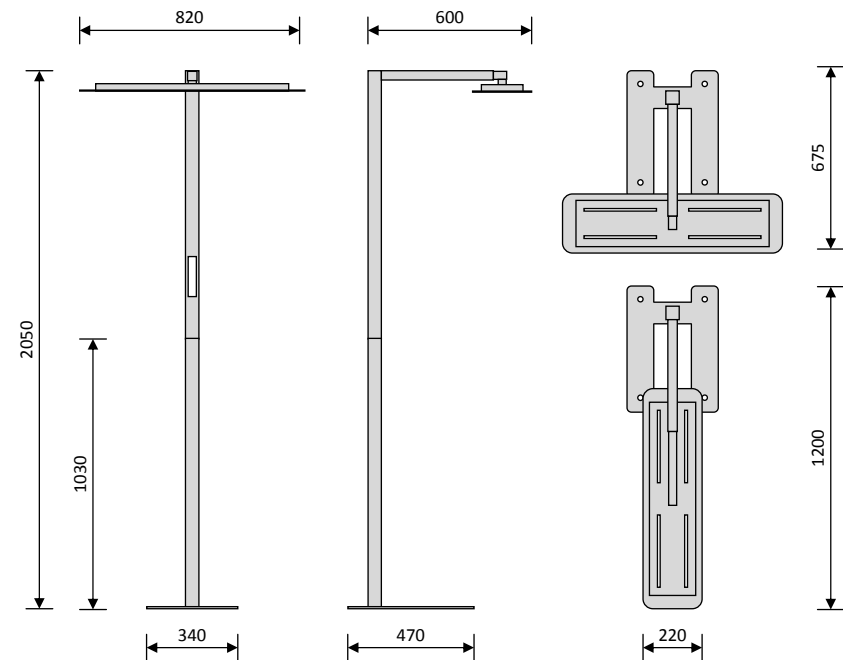

## DESIGN EXAMPLES







# EASY TOO

## Flexible office luminaire for modern workplaces

Easy Too impresses with versatile applications. Due to its pivotable and extendable lamp head, it can be easily adapted to any workplace while allowing for maximum freedom of movement. Optionally available with presence indicator.

Order numbers	Version	Colour	LRC	PIR
ET-SX-9006	floor luminaire	RAL 9006	–	–
ET-SP-9006	floor luminaire	RAL 9006	–	●
ET-SX-9010	floor luminaire	RAL 9010	–	–
ET-SP-9010	floor luminaire	RAL 9010	–	●

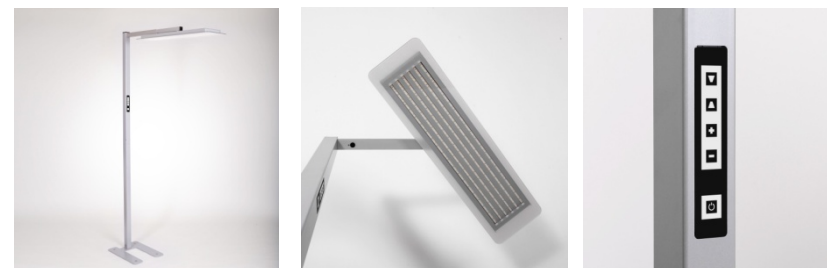


# EASY TOO

## SPECIFICATIONS


Operating voltage	: 24 volts
Power consumption	: max. 55 watts
Standby mode	: 0.5 watts
External power supply	: 220 - 240 volts, 50 / 60 hertz
Light colour	: 4,000 K, neutral white
Luminous flux	: 5,500 lumens
Illuminance	: max. 800 lux
Illumination	: direct / indirect, switched separately
Operation	: switchable / dimmable / PIR
Lamp	: LED
Protection class	: IP20

## FEATURES

Lamp head	: extendable and pivotable by 90°
Base plate	: height adjusters can be easily operated from the top
Pole	: divisible
Surface	: RAL9006 white aluminum / RAL9010 pure white
Packaging dimensions	: L / W / H = 1,200 / 400 / 150 mm
Weight	: approx. 20 kg

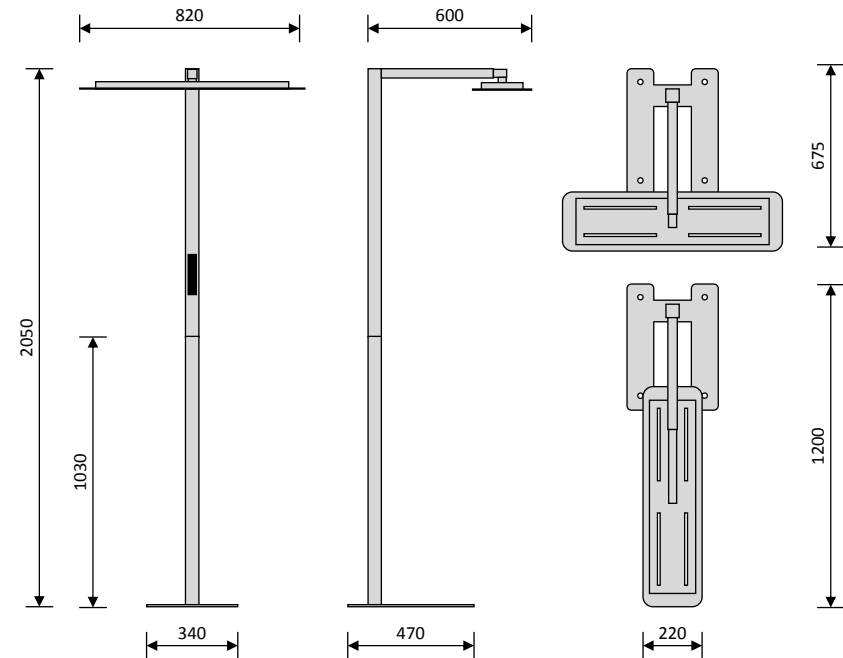

## DESIGN EXAMPLES

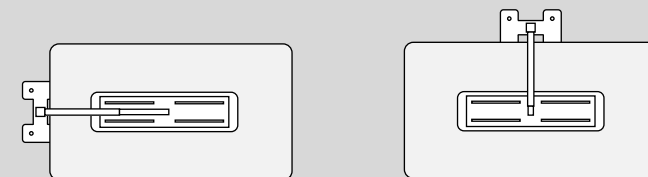



## EASY TANDEM




# EASY TANDEM

## Office double floor luminaire with Luminosity Range Control

Easy Tandem office double floor luminaire combines direct and indirect illumination to ensure constant light conditions at any desktop height of two separate sit stand desks. The integrated sensor system brings the light to the place where it is needed: your desktops. Optionally available with presence indicator.

Order numbers	Version	Colour	LRC	PIR
EO-DL-9006	double floor luminaire	RAL 9006	●	–
EO-DP-9006	double floor luminaire	RAL 9006	●	●
EO-DL-9010	double floor luminaire	RAL 9010	●	–
EO-DP-9010	double floor luminaire	RAL 9010	●	●




# EASY TANDEM

## SPECIFICATIONS


Operating voltage	: 24 volts
Power consumption	: max. 110 watts
Standby mode	: 0.5 watts
External power supply	: 220 - 240 volts, 50 / 60 hertz
Light colour	: 4,000 K, neutral white
Luminous flux	: 11,000 lumens
Illuminance	: 800 lux at all desktop heights
Illumination	: direct / indirect / spot, switched separately
Operation	: switchable / dimmable / LRC / PIR
Lamp	: LED
Protection class	: IP20

## FEATURES

Lamp head	: extendable and pivotable by 90°
Base plate	: height adjusters can be easily operated from the top
Pole	: divisible
Surface	: RAL9006 white aluminum / RAL9010 pure white
Packaging dimensions	: L / W / H = 1,200 / 1,100 / 150 mm
Weight	: approx. 34 kg

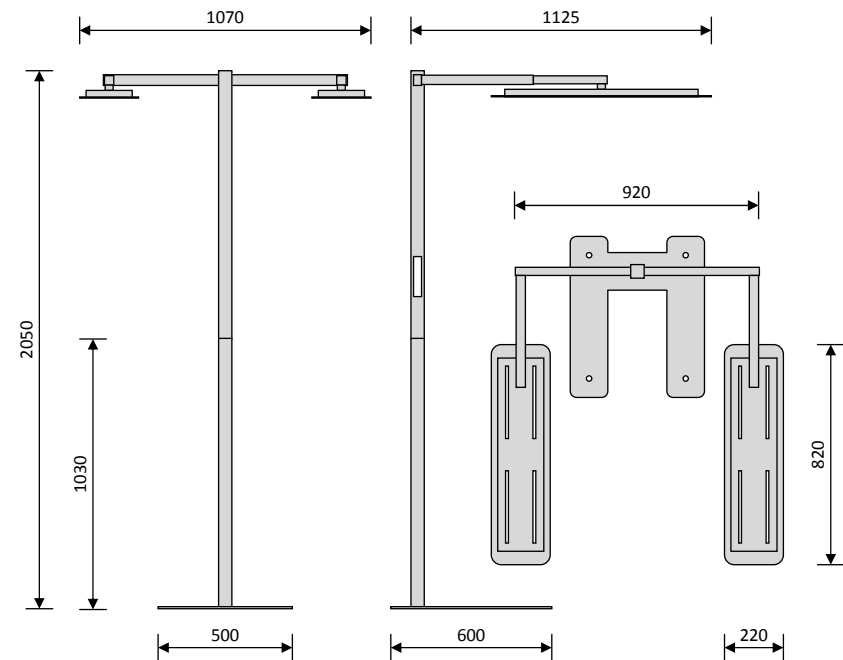

## DESIGN EXAMPLES

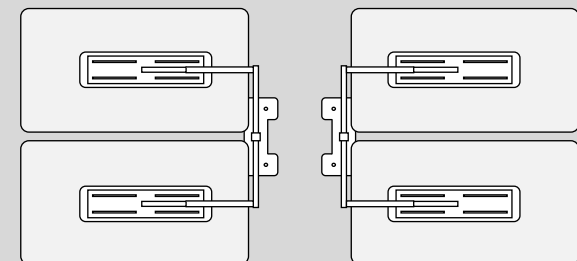



## EASY TWIN




# EASY TWIN

## Office double floor luminaire with Luminosity Range Control

Easy Twin office double floor luminaire combines direct and indirect illumination with two extendable and pivotable lamp heads to ensure constant light conditions at any desktop height of two separate sit stand desks. The integrated sensor system brings the light to the place where it is needed: your desktops. Optionally available with presence indicator.

Order numbers	Version	Colour	LRC	PIR
EO-WL-9006	double floor luminaire	RAL 9006	●	–
EO-WP-9006	double floor luminaire	RAL 9006	●	●
EO-WL-9010	double floor luminaire	RAL 9010	●	–
EO-WP-9010	double floor luminaire	RAL 9010	●	●






# EASY TWIN

## SPECIFICATIONS


Operating voltage	: 24 volts
Power consumption	: max. 110 watts
Standby mode	: 0.5 watts
External power supply	: 220 - 240 volts, 50 / 60 hertz
Light colour	: 4,000 K, neutral white
Luminous flux	: 11,000 lumens
Illuminance	: 800 lux at all desktop heights
Illumination	: direct / indirect / spot, switched separately
Operation	: switchable / dimmable / LRC / PIR
Lamp	: LED
Protection class	: IP20

## FEATURES



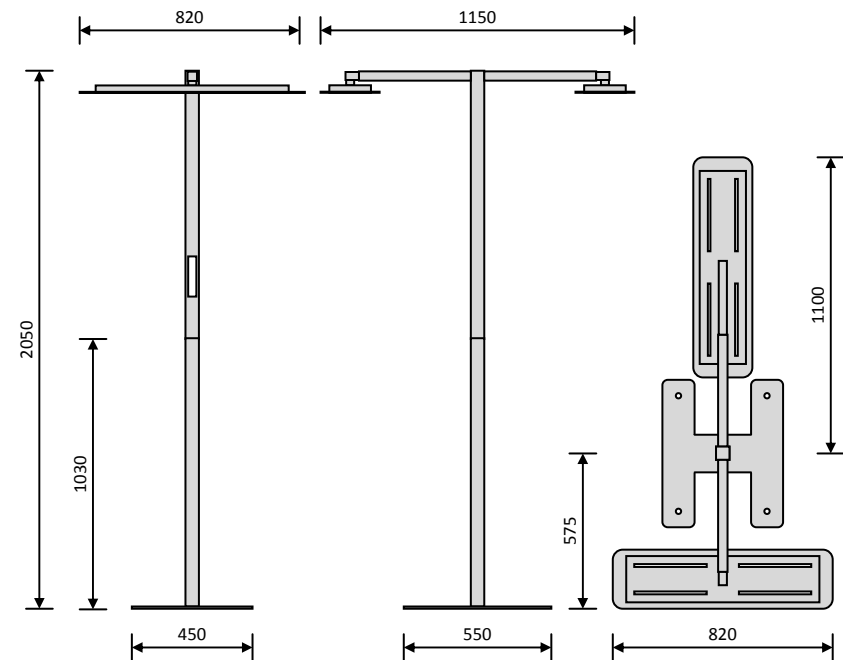

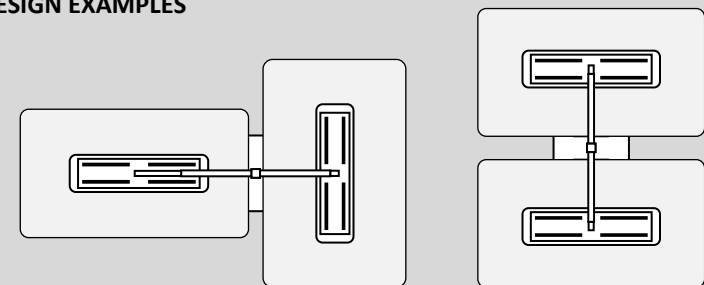

Lamp head	: extendable and pivotable by 90°
Base plate	: height adjusters can be easily operated from the top
Pole	: divisible
Surface	: RAL9006 white aluminum / RAL9010 pure white
Packaging dimensions	: L / W / H = 1,200 / 600 / 150 mm
Weight	: approx. 31 kg



## DESIGN EXAMPLES



# EASY LUMINAIRES OVERVIEW

	Order numbers	Model		Version			Sensors		Colour
		Easy <u>O</u> ne	Easy <u>T</u> oo	<u>S</u> ingle	<u>T</u> win	Tandem	<u>L</u> RC	<u>P</u> IR	RAL
	EO-SL-9006	●		●			●		9006
	EO-SL-9010	●		●			●		9010
	EO-SP-9006	●		●			●	●	9006
	EO-SP-9010	●		●			●	●	9010
	EO-WL-9006	●			●		●		9006
	EO-WL-9010	●			●		●		9010
	EO-WP-9006	●			●		●	●	9006
	EO-WP-9010	●			●		●	●	9010
	EO-DL-9006	●				●	●		9006
	EO-DL-9010	●				●	●		9010
	EO-DP-9006	●				●	●	●	9006
	EO-DP-9010	●				●	●	●	9010
	ET-SX-9006		●	●					9006
	ET-SX-9010		●	●					9010
	ET-SP-9006		●	●				●	9006
	ET-SP-9010		●	●				●	9010
	ET-WX-9006		●		●				9006
	ET-WX-9010		●		●				9010
	ET-WP-9006		●		●			●	9006
	ET-WP-9010		●		●			●	9010
	ET-DX-9006		●			●			9006
	ET-DX-9010		●			●			9010
	ET-DP-9006		●			●		●	9006
	ET-DP-9010		●			●		●	9010

# LRC


## Luminosity Range Control

### Do you know the Inverse-square law?


The illuminance (in lux) decreases with the square distance from the light source, double distance means four times reduced illuminance. When conventional office lights are used with height-adjustable desks, there may be major brightness differences between the highest and lowest desktop positions. Fatigue and concentration disorders may result from this.

### Intelligent light is the solution


If you want to take full advantage of your sit stand desk and regularly change your working position, you need a luminaire which provides constant light conditions at any desktop height. The active "Luminosity Range Control" invented by Easy Lights ensures that the light angle and illuminance are automatically adapted with constant illuminance to the desktop height of sit stand desks.

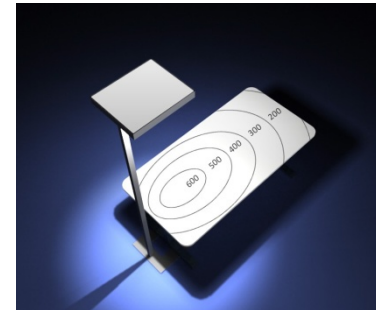


Office floor lamp      minimum table height

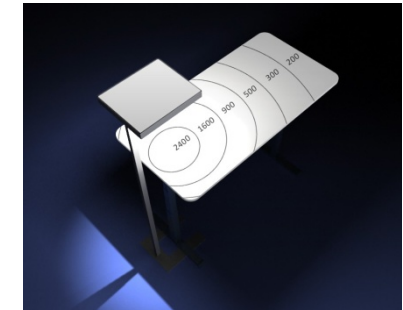

Office floor lamp      maximum table height

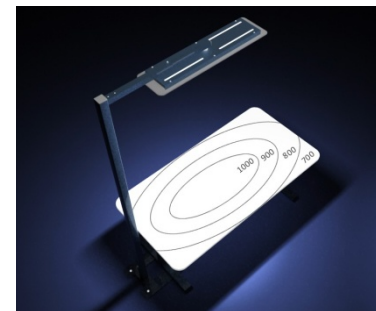

Easy One with LRC      minimum table height

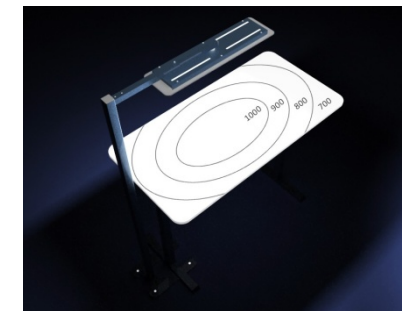

Easy One with LRC      maximum table height

E ▲ S Y L I G H T S



**Designpreis  
Brandenburg**  
2017 | 3. PREIS  
KATEGORIE: LICHTDESIGN

Innovationspreis  
Havelland  
Gewinner 2018



Easy Lights GmbH  
Bahnhofstraße 26  
14624 Dallgow-Döberitz  
Germany

+49 3322 234 653  
info@easy-lights.eu

[www.easy-lights.eu](http://www.easy-lights.eu)